

ITEM:	PROJECT NAME:	DATE:

# REFRIGERATED SELF-SERVE ISLAND MERCHANDISER

MO	DEL	IMS	<b>S</b> 6	OS	C-2
				v	

☐ IMSS60SC-3



Designed with impulse sales in mind. Get maximum return and increased profits with shop-around merchandising.

#### **STANDARD FEATURES**


- Adjustable black metal shelves, two or three tiers.
- LED top and undershelf lighting.
- Black metal base, interior and canopy. Choice of six standard laminates on exterior. Other color laminates are optional.
- Curved air deflector.
- Condensate evaporator provided for a totally self-contained system.
- Easy clean, rustproof insulated evaporator coil compartment.

- Easily accessible light switch and temperature control.
- Adjustable feet.
- Refrigeration controls maintain 40° F. Note: Case temperature will vary if the air curtain is disrupted.
- R404 Refrigerant.
- Insulated with high-density foam.
- Thermometer.
- UL Safety and UL Sanitation Listed to NSF Standard No. 7.

## REFRIGERATED SELF-SERVE ISLAND MERCHANDISER

### **OPTIONAL ACCESSORIES:**


- ☐ Special Color Laminated Exterior Finish
- □ Recessed Casters or Legs
- ☐ Cord and Plug
- ☐ Remote Refrigeration
- ☐ Condensate Pump
- ☐ Cart Bumper
- ☐ Top-Mounted Electrical

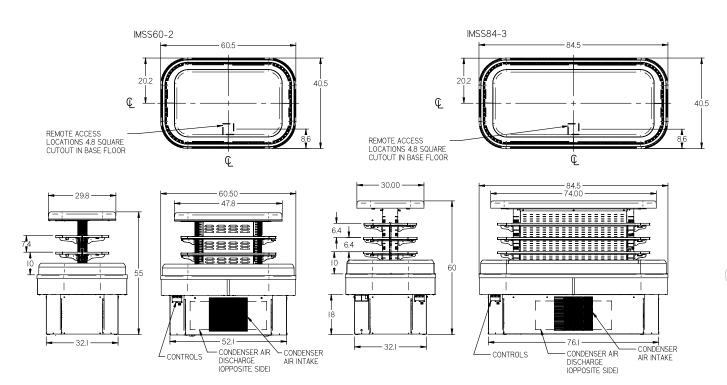

#### **SPECIFICATIONS:**

Model	Dimensions L W H	Shipping Weight (lbs)	Display Area (square feet)	Self-Contained with Condensate Pan 208-230/60/1	Remote with Condensate Pan 208-230/60/1
☐ IMSS60SC-2	60" x 40" x 55"	750	2 Tiers - 24.0	1 1/2 HP • 20 AMPS	10 AMPS
☐ IMSS60SC-3	60" x 40" x 60"	800	3 Tiers - 31.3	1 1/2 HP • 20 AMPS	10 AMPS
☐ IMSS84SC-2	84" x 40" x 55"	930	2 Tiers - 31.7	1 1/2 HP • 20 AMPS	10 AMPS
☐ IMSS84SC-3	84" x 40" x 60"	930	3 Tiers - 41.4	1 1/2 HP • 20 AMPS	10 AMPS

- Case temperature will vary if the air curtain is disrupted.
- Refrigerated cases are designed to operate in a maximum environment of 75°F ambient and 55% relative humidity.









## **FEDERAL INDUSTRIES**

A Standex Company

215 FEDERAL AVENUE, BELLEVILLE, WISCONSIN 53508-9201

PHONE: 800-356-4206 EMAIL: geninfo@federalind.com FAX: 608-424-3234 WEBSITE: www.federalind.com

