



Project:

Item Number:

Quantity:

**MODULAR DROP-IN: NSF7 REFRIGERATED COLD PANS**



Modular Drop-In: NSF7 Refrigerated Cold Pans

**DESCRIPTION**

The modular drop-in NSF7 refrigerated cold pans are designed for top-mount installation.

A full-perimeter drip edge contains spills and condensation within the stainless steel countertop area of the drop-in.

High-density polyurethane foam insulation surrounds the exterior of the well to provide most efficient performance with energy savings.

A 3" (7.62 cm) recess lowers the food pan below the work surface to minimize the impact of ambient air. The 6 5/8" (16.8 cm) deep display well is designed to accommodate standard 12" x 20" (30.4 cm x 50.8 cm) pans up to 6" (15.24 cm) deep.

Refrigeration coils surround the exterior side walls of well for maximum cooling. Refrigerant is R134A to meet federal standards.

1" (2.5 cm) integrated drain is standard. Optional perforated false bottom.

**Modular drop-in orders cannot be canceled or returned**

**Agency Certifications**



Due to continued product improvement, please consult [www.vollrathco.com](http://www.vollrathco.com) for current product specifications.

- MODELS:**
- 36429 Two Pan
  - 36430 Three Pan
  - 36434 Four Pan
  - 36436 Five Pan
  - 36438 Six Pan

**FEATURES**

- Top is 18-gauge stainless steel, 18-8 Type 304, with 3/8" (9.52 mm) overhang on all sides and die stamped with full-perimeter drip edge. Molded breaker gasket fitted under drip edge.
- Flat work surface around opening.
- Seamless well is 18-gauge 18-8 stainless Type 304, 6 5/8" (16.8 cm) deep.
- 1" (2.5 cm) integral drain is standard.
- Refrigeration coils surround exterior side walls of well.
- Inner well assembly insulated with foamed in place polyurethane foam insulation.
- Condensing unit suspended below well.
- Temperature control on compressor.
- For complete air circulation, two openings in the cabinet are required. Louver cutout size is 8" x 10" (20.3 cm x 25.4 cm).
- Exterior housing is 18-gauge galvanized steel.
- Optional perforated false bottom is nominal 1" (2.5 cm) high and constructed of 18-gauge Type 304 stainless steel. False bottom will reduce pan depth by same dimension. False bottom options:

| Drop-In Model | False Bottom Model |
|---------------|--------------------|
| 36429         | 36913              |
| 36430         | 36914              |
| 36434         | 36915              |
| 36436         | 36916              |
| 36438         | 36917              |

- Unit comes with cord and plug and does not require hard wiring.
- On/Off switch is mounted on side of compressor housing.
- Positioning clips provided to center drop-in within cutout.
- One year parts and labor warranty. Additional four years on compressor.
- Cold drop-ins are best used for holding periods up to 4 hours. For best performance, stainless steel containers are recommended.

|                  |
|------------------|
| <b>Approvals</b> |
| <b>Date:</b>     |



Setting the Standard™

[www.vollrathco.co](http://www.vollrathco.co)

The Vollrath Company, L.L.C.  
 1236 North 18th Street  
 Sheboygan, WI 53082-0611  
 U.S.A.  
 Main Tel: 800.624.2051  
 Service Tel: 800.628.0832  
 FAX: 800.752.5620


Vollrath of Canada, Co  
 Tel: 800.695.8560  
 FAX: 800.752.5620

## MODULAR DROP-IN: NSF7 REFRIGERATED COLD PANS

**MODELS:** 36429 Two Pan  
 36430 Three Pan  
 36434 Four Pan  
 36436 Five Pan  
 36438 Six Pan

### DIMENSIONS

- ❑ Opening cutout must have a 7/8" (2.22 cm) corner radius.
- ❑ Dimensions shown in inches (cm).

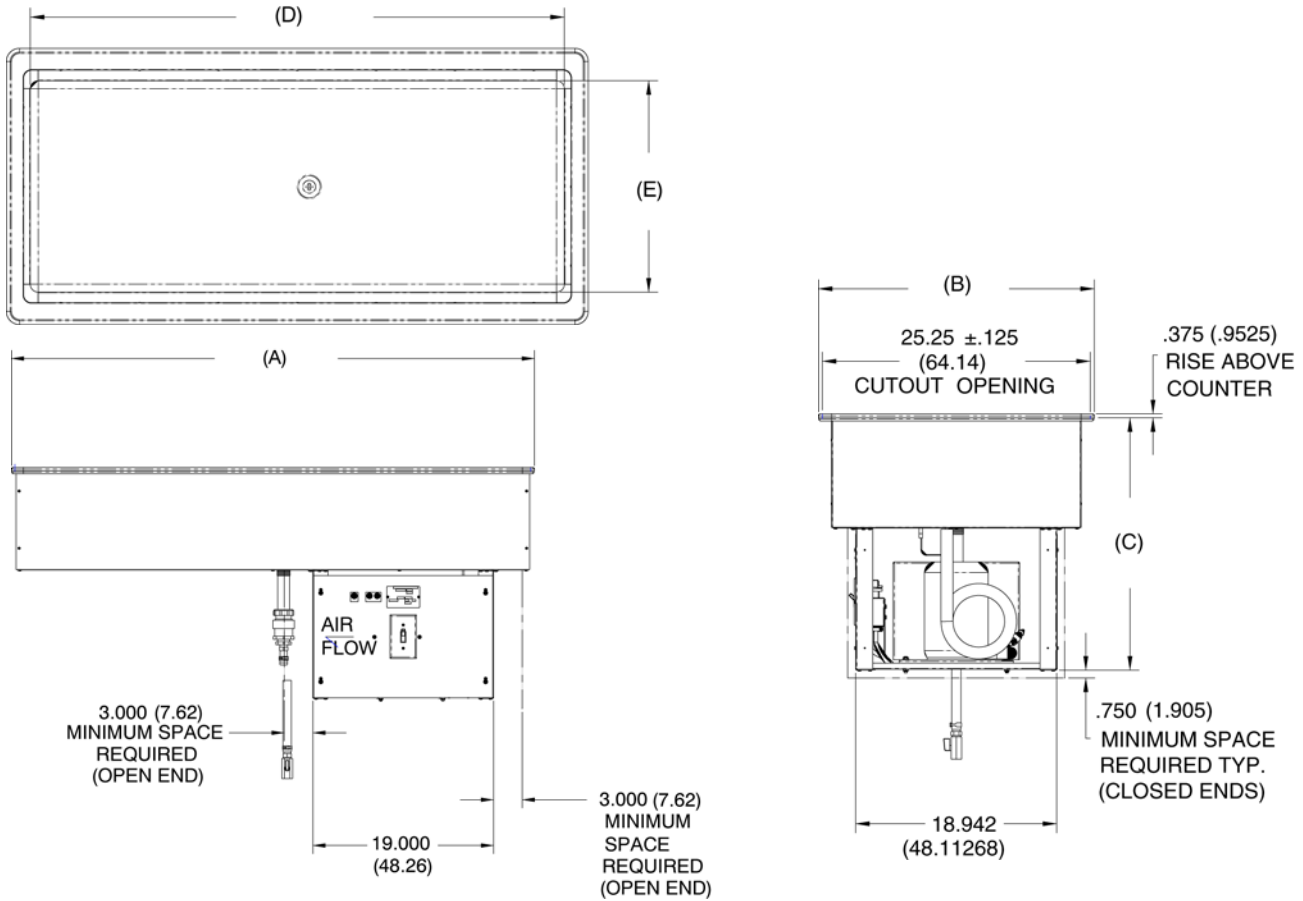

| Item  | (A)<br>Length      | (B)<br>Width     | (C)<br>Height    | (D)                | (E)                | Cutout             |                  | Comp   | Voltage | Amps | Plug  | Receptacles |
|-------|--------------------|------------------|------------------|--------------------|--------------------|--------------------|------------------|--------|---------|------|-------|-------------|
|       |                    |                  |                  |                    |                    | Length             | Width            |        |         |      |       |             |
| 36429 | 29.00<br>(73.66)   | 26.00<br>(66.04) | 25.00<br>(63.50) | 24.75<br>(62.865)  | 19.875<br>(50.482) | 28.25<br>(71.80)   | 25.25<br>(64.14) | 1/4 HP | 120     | 4.9  | 5-15P | 5-15R       |
| 36430 | 41.50<br>(105.40)  | 26.00<br>(66.04) | 25.00<br>(63.50) | 37.50<br>(95.25)   | 19.875<br>(50.482) | 40.75<br>(103.505) | 25.25<br>(64.14) | 1/4 HP | 120     | 4.9  | 5-15P | 5-15R       |
| 36434 | 54.75<br>(139.065) | 26.00<br>(66.04) | 25.00<br>(63.50) | 50.25<br>(127.635) | 19.875<br>(50.482) | 54.00<br>(137.16)  | 25.25<br>(64.14) | 1/3 HP | 120     | 7.2  | 5-15P | 5-15R       |
| 36436 | 68.00<br>(172.72)  | 26.00<br>(66.04) | 25.00<br>(63.50) | 63.00<br>(160.02)  | 19.875<br>(50.482) | 67.25<br>(170.815) | 25.25<br>(64.14) | 1/2 HP | 120     | 11   | 5-20P | 5-20R       |
| 36438 | 81.25<br>(206.375) | 26.00<br>(66.04) | 25.00<br>(63.50) | 75.75<br>(192.405) | 19.875<br>(50.482) | 80.50<br>(204.47)  | 25.25<br>(64.14) | 1/2 HP | 120     | 11   | 5-20P | 5-20R       |



www.vollrathco.com

The Vollrath Company, L.L.C.  
 1236 North 18th Street  
 Sheboygan, WI 53082-0611  
 U.S.A.  
 Main Tel: 800.624.2051  
 Service Tel: 800.628.0832  
 FAX: 800.752.5620

Vollrath of Canada, Co  
 Tel: 800.695.8560  
 FAX: 800.752.5620