

## **VHP SERIES**

Heavy Duty Gas Hot Plate



**Model VHP424** 







#### SPECIFIER STATEMENT

### **Exterior Dimensions:**

34" wide x 31%" deep x 12" working height CSA design certified. NSF certified.

SPECIFY TYPE OF GAS WHEN ORDERING. SPECIFY ALTITUDE WHEN ABOVE 2,000 FEET.

Project		
AIA #	SIS#	
Item #	Quantity	_ C.S.I. Section 114000

# MODELS NHP212

□ VHP212	12" wide
□ VHP424	24" wide
□ VHP636	36" wide
□ VHP848	48" wide
☐ VHP212U	12" wide with 4" elevated rear step-up burners
☐ VHP424U	24" wide with 4" elevated rear step-up burners
☐ VHP636U	36" wide with 4" elevated rear step-up burners
□ VHP848U	48" wide with 4" elevated rear step-up burners

#### STANDARD FEATURES

- Stainless steel sides, control panel, top trim and backsplash
- Full width pull out crumb tray
- Heavy duty cast iron top grates
- 30,000 BTU/hr. (27,500 BTU/hr. for LP gas) open burners with lift-off heads
- Standing pilot ignition system
- One infinite heat control valve for each burner
- 4" adjustable legs
- ¾" NPT rear gas connection and gas pressure regulator
- One year limited parts and labor warranty

#### **OPTIONS**


- ☐ Cutting board
- ☐ Condiment rail
- ☐ Plate rail
- ☐ Stainless steel stand with undershelf and casters


Approved by	Date	Approved by	Date



#### INSTALLATION INSTRUCTIONS INSTALLATION MANUAL

- 1. A gas pressure regulator supplied with the unit must be installed. Natural gas 5.0" (127 mm) W.C., propane gas 10.0" (254 mm) W.C.
- 2. An adequate ventilation system is required for commercial cooking equipment. Information may be obtained by visiting the National Fire Protection Association website at <a href="https://www.nfpa.org/">https://www.nfpa.org/</a>. Refer to NFPA No. 96.
- 3. These units are manufactured for installation in accordance with ANSZ223.1A (latest edition), National Fuel Gas Code. Information may be obtained from The American Gas Association website at https://www.aga.org/.

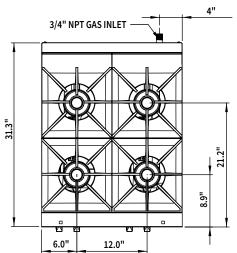





#### **NOTE: In The Commonwealth of Massachusetts**

All gas appliances vented through a ventilation hood or exhaust system equipped with a damper or with a power means of exhaust shall comply with 248 CMR.

4.	Equipment Clearance	Non-Com	bustibles	Combu	stibles
		Sides	Back	Sides	Back
	Standard	0"	0"	13"	6"
	Step-Up	0"	0"	13"	9"

5. This appliance is manufactured for commercial installation only and is not intended for home use.

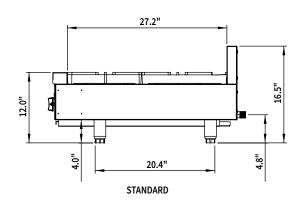

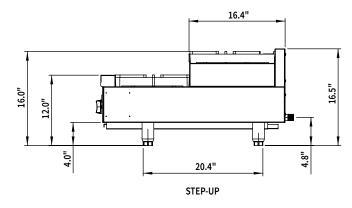

## CAD and/or Revit Files Available

Model	Width	Depth	Overall Height*	Working Height*	No. of Burners	Total BTU/Hr. Natural Gas	Total BTU/Hr. Propane Gas	Approximate Shipping Wt. (Lb./KG)
VHP212	12"	31%"	16%"	12"	2	60,000	55,000	95 lbs./43 kg
VHP424	24"				4	120,000	110,000	165 lbs./74 kg
VHP636	36"				6	180,000	165,000	265 lbs./119 kg
VHP848	48"				8	240,000	220,000	310 lbs./140 kg

<sup>\*</sup>These are nominal dimensions and can vary by +1.75" with adjustable legs.

As continued product improvement is a policy of Vulcan, specifications are subject to change without notice.