



12" Deep Triple Compartment Stainless Steel Sink
Standard Series Sink



Model 3C16X20-R-18



SPECIFICATIONS:

Elkay SSP Standard Series three compartment sink with 12" deep welded bowl and 10" backsplash with 2" return. The sink is constructed of 16 gauge 300 series stainless steel. The unit, including all welds and seems, has been ground and polished to a #4 finish. Legs are 1-5/8" galvanized steel with optional cross bracing and adjustable plastic feet.

OPTIONS AND ACCESORIES:

- Stainless steel legs
- Additional faucet holes
- H-frame legs
- Scrap baskets
- Rack slides
- Lever waste with and without overflow

(Additional options are available)

ITEM #: _____

Model #: _____

Project #: _____

MATERIALS


- **Sink and Bowl:** 16 gauge 300 series stainless steel.
- **Top:** Drainboards and backsplash are 16 gauge 300 series stainless steel.
- **Legs:** All sinks furnished with 1-5/8" diameter heavy gauge galvanized tubing with plated galvanized leg gussets and high impact corrosion resistant fully adjustable 1" feet.

FEATURES

- 12" Deep welded bowls with 3/4" coved radius and 2" divider between each tub.
- 10" Backsplash with 2" return.
- Tile edge for easy installation.
- Sink bowls are solid welded construction which supplies consistent metal gauge thickness throughout total depth of bowl.
- Welds and stainless steel ground to a #4 finish.
- Drainboards are dipped and the bowls are die-stamped to ensure positive drainage.
- 1-1/2" sanitary rolled edge rim design which meet industry standards.
- All legs are welded to underside of tubs to allow for maximum use of space under drain boards.
- 3-1/2" drain opening centered in each tub, with basket strainers included.
- 1 year warranty is included.



12" Deep Triple Compartment Stainless Steel Sink
Standard Series Sink

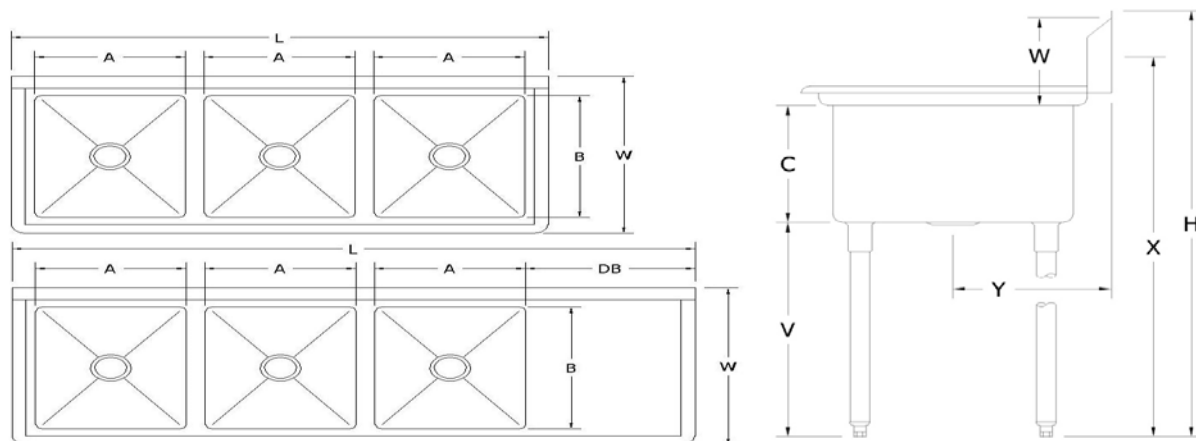

Model Number	Bowl Dimensions (inches)			Overall Size (inches)			Drainboard		Weight (lbs)
	Length	Width	Depth	Length	Width	Height	Size (inches)	Location	
Triple Compartment									
3C16X20218	16	20	12	88	25.5	44.75	18	L & R	71
3C18X180	18	18	12	63	23.5	44.75	0	None	73
3C18X18L18	18	18	12	78.5	23.5	44.75	18	Left	82
3C18X18R18	18	18	12	78.5	23.5	44.75	18	Right	82
3C18X18218	18	18	12	94	23.5	44.75	18	L & R	89
3C18X18224	18	18	12	106	23.5	44.75	24	L & R	97
3C18X240	18	24	12	63	29.5	44.75	0	None	85
3C18X24L18	18	24	12	78.5	29.5	44.75	18	Left	96
3C18X24R18	18	24	12	78.5	29.5	44.75	18	Right	96
3C18X24218	18	24	12	94	29.5	44.75	18	L & R	103
3C18X24L24	18	24	12	84.5	29.5	44.75	24	Left	98
3C18X24R24	18	24	12	84.5	29.5	44.75	24	Right	98
3C18X24224	18	24	12	106	29.5	44.75	24	L & R	112
3C20X28220	20	28	12	107	29.5	44.75	20	L & R	106
3C20X28224	20	28	12	115	29.5	44.75	24	L & R	130
3C24X240	24	24	12	81	29.5	44.75	0	None	103
3C24X24L24	24	24	12	102.5	29.5	44.75	24	Left	118
3C24X24R24	24	24	12	102.5	29.5	44.75	24	Right	118
3C24X24224	24	24	12	124	29.5	44.75	24	L & R	129