



# RADIANT CHARBROILERS

RADIANT CHARBROILERS



JB-36

MODEL NO.	DESCRIPTION
<input type="checkbox"/> JB-18	18" wide charbroiler
<input type="checkbox"/> JB-24	24" wide charbroiler
<input type="checkbox"/> JB-30	30" wide charbroiler
<input type="checkbox"/> JB-36	36" wide charbroiler
<input type="checkbox"/> JB-42	42" wide charbroiler
<input type="checkbox"/> JB-48	48" wide charbroiler
<input type="checkbox"/> JB-60	60" wide charbroiler
<input type="checkbox"/> JB-72	72" wide charbroiler

## DESCRIPTION

Radiant Charbroiler to be Model # JB-\_\_\_\_\_ manufactured by Jade®. Provide heavy duty cast iron grates with built in grease guides. One 15,000 BTU/hr burner every 6" of broiler width controlled by infinite gas valves. Heavy duty cast iron burner radiants. Furnish 12 gauge all welded firebox. Provide two separate 14 gauge steel drip pans. To be of 14 gauge all welded construction with stainless steel front, plate shelf, gas tubing throughout and legs with adjustable feet. Each burner to be furnished with one stainless steel pilot. Provide 14 gauge welded drip tray. Unit to be provided with 3/4" gas regulator.

## SPECIFY TYPE OF GAS WHEN ORDERING.

## SPECIFY ALTITUDE WHEN ABOVE 2,000 FT.

Floor Model      Add "F" to end of model number

Example: JB-36F Floor model, 36" wide

## STANDARD FEATURES

- Heavy duty 4 bar cast iron top grates with built in grease guides that channel away excess fat and reduce flaring
- One 15,000 BTU/hr burner every 6" broiler
- Infinite control manual gas valves at each burner for precise heat control
- Heavy duty cast iron burner radiants
- 12 gauge all welded firebox construction
- 2 separate 14 gauge steel drip pans to control flare ups
- Stainless steel gas tubing throughout
- Stainless steel pilot tips resist corrosion
- Stainless steel legs with adjustable feet
- 3/4" gas regulator (shipped loose, MUST be installed for proper operation.)

## OPTIONS & ACCESSORIES

- Stainless steel sides
- Stainless steel wrap around splash 3" high  6" high
- Stainless steel 8" extended plate shelf
- 8" deep cutting board,  Poly  Maple
- Fish grate  3 Bar grate
- 6" casters, front two locking (floor models only)
- 36" flex hose with quick disconnect & restraining device
- 48" flex hose with quick disconnect & restraining device



WWW.JADERANGE.COM


A HIGHER DEGREE OF PERFORMANCE™

JADE PRODUCTS COMPANY • 2650 Orbiter Street • Brea, CA 92821 • PHONE: 800-884-5233 FAX: 714-961-2550

Note: In line with their policy to continually improve products, Jade reserves the right to change materials and specifications without notice. Printed in USA



# RADIANT CHARBROILERS

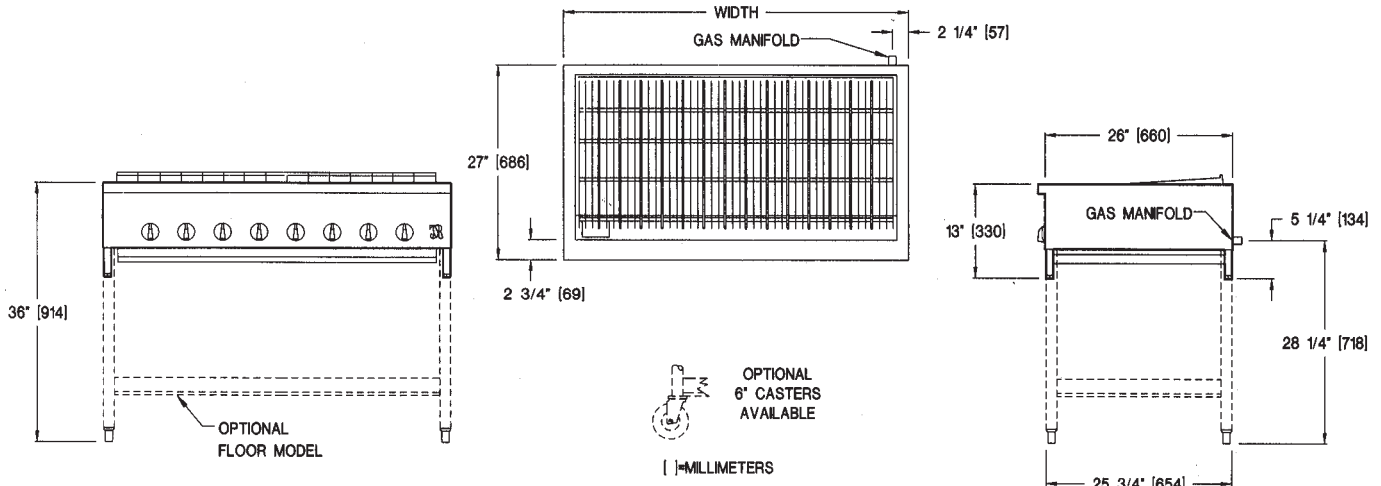

MODEL	BURNERS	BTUS	WIDTH	DEPTH	HEIGHT	APPX. SHR.WT.	APPX. CUBE COUNTER/FLOOR
JB-18	3	45,000	18"	27"	see drawing	200 lbs.	11/20
JB-24	4	60,000	24"	27"	" "	250 lbs.	13/24
JB-30	5	75,000	30"	27"	" "	300 lbs.	17/31
JB-36	6	90,000	36"	27"	" "	350 lbs.	19/38
JB-42	7	105,000	42"	27"	" "	400 lbs.	24/43
JB-48	8	120,000	48"	27"	" "	570 lbs.	27/49
JB-60	10	150,000	60"	27"	" "	600 lbs.	33/62
JB-72	12	180,000	72"	27"	" "	700 lbs.	39/72

Note: For floor model add "-F" to end of Model #.

NOTE: SPECIFY TYPE OF GAS WHEN ORDERING.

UTILITY INFORMATION:

- 3/4" Connection (see drawing for location)
- Required operating pressure:
  - Natural Gas 5" W.C. minimum
  - Propane Gas 10" W.C. minimum
  - 14" W.C. maximum

Note: The gas regulator MUST be installed for proper operation. This unit must be connected with the gas appliance regulator supplied.